


## ECG/Cisco

### Features

- Enables sending Unite text messages to Cisco IP phones
- Certified according to Cisco Technology Developer Program, CTDIP.
- Supports Cisco 7905, 7912, 7920, 7921, 7925, 7940, 7960, 7971 and IP Communicator
- Supports up to 500 telephones
- Queue with up to 20 messages per user
- Up to 500 characters per message
- Runs on highly secure solid state ELISE2 module.

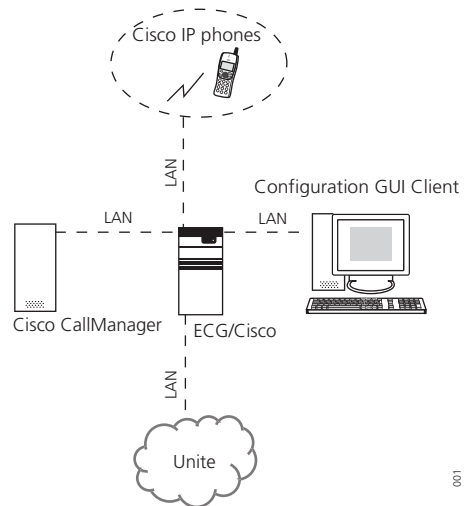

100

### Technical Specifications

#### Hardware Requirement

ELISE2 / 64 MB RAM / 64 MB FLASH or higher For technical specifications refer to Data Sheet for ELISE2 Hardware TD 92524GB

#### PC Requirements

Installation and administration: Microsoft Internet Explorer 6.0™ or later  
 Screen resolution: Min. 1024 x 768 pixels

#### Language

Installation GUI: English only  
 IP phones interactive text: Translatable

#### Licence options

ECG-L1 Basic licence for ECG/Cisco  
 ECG-L1U10 Licence per 10 up to 500 users

#### Supported Messaging Functions

1 - way paging  
 2 - way paging with accept or accept/reject  
 Interactive Messaging with "number to call"  
 Erase Message

**Performance**

Capacity: 18 000 messages per hour  
500 telephones  
Queue of 20 messages per phone  
500 characters per message

**Supported Cisco Equipment**

IP phones 7905, 7912, 7920, 7921, 7925, 7940, 7960, 7971<sup>1</sup> and IP Communicator<sup>1</sup>  
Unified Communications Manager 6.x  
Unified Communications Manager 7.x

**LAN**

Data interface: 10baseT or 100baseT Ethernet (Modular jack, RJ45)

**Time**

Time sources: NTP server, other Unite module with time server ability, or manually from web browser.  
Time server ability: No  
Automatic daylight saving adjustment: Yes  
Date and time format: Adjustable to commonly used formats

**Connections, I/O Ports** *(Applies to the ELISE2 hardware with ECG/Cisco software)*

Serial ports: Not used.  
LAN: 10baseT or 100baseT Ethernet (Modular jack, RJ45)  
Error relay output: Active when the relay operates or is released  
Used for fault actions  
AUX outputs: Not used

1. Message Deletion requires user interaction.

*Specifications are subject to change without notice.*